


**50 µm PP-Film gridded imprinted  
with electrostatic charge.**

# FOLIOCONTACT

## gridded Flipchart-Film

Rawmaterial:	<b>PP coex/Cast 3-layers</b>
Colour:	<b>white gridded</b>
Surfacetreatment:	<b>Corona 42Dyn</b>
Ghauge:	<b>50µm</b>
Operating Temperature:	<b>10° bis 45°C</b>
Opacity:	<b>≤80%</b>
Printingprocess:	<b>Flexo- oder Rotogr.-Print</b>
Sheetsize:	<b>600 x 800mm</b>
Sheets per Roll	<b>25</b>
Roll length:	<b>20m</b>
SQM/ Roll:	<b>12m<sup>2</sup></b>
Single-shipment	<b>min 1 Roll</b>
Packaging Units:	<b>1, 2, 9, 18</b>
1 Roll per	<b>Dispenser</b>
Shipping large amounts	<b>Euro-Pallet</b>
Storage Duration:	<b>min. 5 Years (dry)</b>

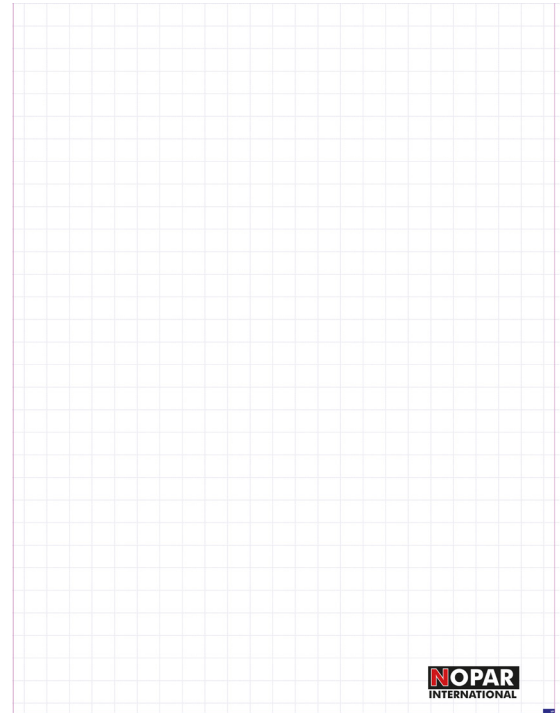

### FOLIOCONTACT

is an environmental friendly Flip-Chart Media, made of Polypropylen.  
It has been developed and been produced by NOPAR INTERNATIONAL GMBH.

FOLIOCONTACT is a special produced 3-layer coex cast PP-Film. The mid Layer is able to take on ionisation and keep it for at least 5 Years, depending on the storage conditions, packed and boxed at 40-50% rel. humidity, at 18°-22°C.

The 25 sheets in the size of 600mm width and 800mm length can easily be separated from the roll at the provided perforation line. Each sheet adhere to virtually any surface without any other tools, such as adhesive or pins disputes.

The film is ideally suited for use with permanent markers. When using dry-erase whiteboard markers, it will be not possible to clean the film surface again. Due to the printed surface treatment it will leave ghost writing to the surface alternative for 100% erasability, we recommend the product FOLIO CONTACT ERASABLE.

In addition to the standard version, FOLIO CONTACT can also be individual imprinted, for example with a company logo up to 8 colors. The minimum order for this is based on the complex printing technology at about 220 rolls. For further details please contact NOPAR INTERNATIONAL INC.

FOLIO CONTACT can be recycled, can be disposed with the yellow bag and capable for energy recovery. Safety data sheets can be requested if necessary.

Any reproduction or use of this publication or partially reproduced information in electronic or printed form is prohibited without written permission and acknowledgment by the owner.

Technical Datasheet Release October 2023

**NOPAR**  
**INTERNATIONAL**

NOPAR International GmbH  
Ladestraße 3-3a  
28197 Bremen/Germany  
Phone: +49 421 5208146 0  
Fax: +49 421 5208146 9  
Mail: [info@nopar-international.com](mailto:info@nopar-international.com)  
Web: <http://www.nopar-international.com>



■ ■ ■ made in Germany

Please note that all information supplied is correct to date of print, information. It can change without prior notification. This information does not release the manufacturer from his obligation with regard to proper application and handling of the product. All content is based on available technical knowledge at the time of publication.